

PowerScan™ LR & XLR

Industrial Bar Code Scanners



Ideal for:

- Forklift Scanning Applications
- Warehousing & Outdoor Use
- Inventory Control
- Heavy-Duty Manufacturing

Features:

- Operating range from 5" / 13 cm to 36' / 11 m
- Robust for tough industrial applications
- Flexible & extensive interface capabilities
- Positive trigger feedback for gloved hand operation
- Integrated metal tether hook
- Programmable beeper tone & volume
- Variety of flexible mounting & storage accessories available


The Premier Long Range & Extra Long Range Industrial Performance

The PowerScan LR and XLR scanners have been specifically designed "from the ground up" to meet the demands of tough industrial applications – especially where some labels are scanned up close and others at great distances. The PowerScan LR will read a standard 13 mil UPC label as close as 7" / 18 cm and a 100 mil reflective label 22' / 671 cm away. With the XLR model you can read 15 mil labels as close as 28" / 71 cm and 100 mil reflective labels as far away as a whopping 36' / 11 m.

In any long-range application, you can rely on either the PowerScan LR or XLR for fast, accurate bar code reading of both paper and reflective labels. PSC's QuadraLogic™ II decoding software enables users to successfully read most dirty, smudged and damaged labels...labels that were previously considered unreadable.

Dependable In The Harshest Conditions

Even in the harshest working environments, you can depend on the PowerScan LR & XLR to keep on working. Designed to meet the most stringent drop specification in the industry, the scanner will withstand multiple 6.5' / 2 m drops to concrete. Even dust and moisture won't phase it. In fact, the PowerScan LR and XLR scanners have a rating of IP54, which means they meet or exceed the sealing rating of every portable host terminal on the market. And don't worry about weather conditions – the PowerScan LR and XLR scanners operate in bone-chilling blizzards, down to -22°F / -30°C and scorching desert heat, up to 122°F / 50°C.

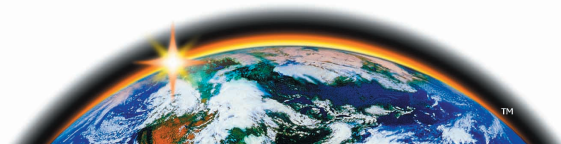

PRODUCT

Mechanical

Dimensions: 2.7 x 4.4 x 7.2" / 6.9 x 11.2 x 18.3 cm

Weight

Scanner: 9.9 ozs. / 280 g
Cable (32"/81 cm): 6.2 ozs. / 176 g

Cable length option

Collapsed: 32" / 81 cm,
Max. Working: 72" / 183 cm;
Collapsed: 80" / 203 cm,
Max. Working: 120" / 305 cm

(For other cable options, contact your PSC sales representative.)

Electrical

Operating voltage: 4 VDC to 14 VDC

Operating current – nominal

Undecoded: 95mA @ 5 VDC

Decoded: 100mA @ 5 VDC

Idling current – low power mode:

<50µA @ 5 VDC

Optical

Light source: Extra Bright 650nm Visible Laser Diode (VLD)

Scan system: Frictionless lifetime flexure mechanism

Rate: 37 scans/sec. nominal

Depth-of-field: Refer to chart on this page

Print contrast ratio: 25% minimum

Pitch: ±65°

Skew: ±55°

Ambient light immunity

Artificial light: 1,200 foot candles / 12912 Lux
Sunlight: 8,000 foot candles / 86080 Lux

Environmental

Temperature rating

Operating: -22° to 122° F / -30° to 50° C

Storage: -40° to 158° F / -40° to 70° C

Humidity: 5 to 95% NC

Shock (at 23°C): withstands multiple 6.5' / 2 m drops to concrete

Vibration: meets MIL-STD-810E

Water & Dust: IEC529 rating IP54DW

Decoding Capability

(autodiscriminates between)

UPC A, E / EAN 8,13 / JAN 8,13
(P2 / P5, Code 128 EAN add-ons)

Code 128 Codabar

Code 39 Interleaved 2 of 5

Code 39 Full ASCII Standard 2 of 5

Code 93 MSI / Plessey

Pharmacode 39

BC412 (available upon request)

Communications

Undecoded: Standard and Intermec-compatible

Multi-interface modules (interchangeable, AutoSelect™ cable determines active interface):

RS232C / Standard Keyboard Wedge /

Wand Emulation

Universal Keyboard Wedge / RS232*

IBM 46XX / RS232C

*This RS232 interface only supports RXD and TXD, no control signals are available.

Safety & Regulatory

Electrical: Complies to Gost R; TÜV; UL; cUL

Emissions: Complies to FCC-A; EN 55022-B

BCIQ CNS13438; AS/NZS 3548; VCCI-B

Laser classification: CDRH Class II (LR),

CDRH Class IIIA (XLR);

(CAUTION: Laser Light –

Avoid direct eye exposure);

IEC 60825 Class 2 (LR & XLR)



Depth-of-Field Chart – (printing resolution, contrast and ambient light dependent)				
Label Density	Long Range (decoded, Code 39)		Extra Long Range (decoded, Code 39)	
	Range		Range	
Paper Labels	7.5 mil	8" to 13" / 20 to 33 cm		
	10 mil	7" to 20" / 18 to 50 cm		
	15 mil	7" to 32" / 18 to 80 cm	3.3'	5.0' / 101 to 152 cm
	20 mil	5" to 4' / 13 to 122 cm	2.3'	6.0' / 71 to 183 cm
	40 mil	8" to 7' / 20 to 213 cm	2.3'	12.0' / 71 to 366 cm
Reflective Labels	55 mil	15" to 9' / 38 to 274 cm	3.3'	15.0' / 101 to 457 cm
	40 mil	22" to 8.3' / 56 to 254 cm	3.3'	15.0' / 101 to 457 cm
	70 mil	3.3' to 15.0' / 101 to 457 cm	6.7'	24.0' / 204 to 730 cm
	100 mil	3.8' to 22.0' / 116 to 671 cm	6.7'	36.0' / 204 to 1097 cm

Accessory mounts also available



Corporate Headquarters

PSC Inc.
959 Terry Street
Eugene OR 97402-9150 USA
Tel: 800 695 5700 or 541 683 5700
Fax: 541 345 7140

Specifications are subject to change without notice.

Additional information concerning this product or other PSC products and services can be found at the PSC website: www.pscnet.com, or contact your PSC representative for more information.



PSC Worldwide Sales and Service locations

Australia - NSW Tel: 61 2 9878 8999 Fax: 61 2 9878 8688	Australia Tel: 61 3 9281 3288 Fax: 61 3 9243 5510	Belgium Tel: 32 2 414 74 09 Fax: 32 2 410 11 63	Brazil Tel: 55 11 5507 7721 Fax: 55 11 5507 7696	Chile Tel: 562-339-7000 Fax: 562-339-7985	China Tel: 86 10 6857 9048 Fax: 86 10 6857 8699	China - South Tel: 86 20 8765 9955 Fax: 86 20 8765 9955	France Tel: 33 1 64 86 71 00 Fax: 33 1 64 46 72 44
Germany Tel: 49 6151 93580 Fax: 49 6151 935858	Hong Kong Tel: 852 25846210 Fax: 852 25210291	India Tel: 91 11 4621586 Fax: 91 11 4623305	Italy Tel: 39 039 629031 Fax: 39 039 6859496	Japan Tel: 81 3 3491 6761 Fax: 81 3 3491 6656	Latin America Tel: 1 305 539 0111 Fax: 1 305 539 0206	Singapore Tel: 65 435 1311 Fax: 65 226 1242	Spain Tel: 34 91 203 65 00 Fax: 34 91 203 65 01
Sweden Tel: 46 4010 84 92 Fax: 46 4010 84 91	Turkey Tel: 90 212 23691 15 Fax: 90 212 23691 16	United Kingdom Tel: 44 1923 809500 Fax: 44 1923 809505					