

# QuickScan® QS2500

Linear Imager Handheld Scanner



#### *Ideal for:*

- Retail Applications
- POS and area registers
- Inventory
- Office Automation
- Medical and document tracking
- Light Industrial

#### *Features:*

- Reads Reduced Space Symbology (RSS), PDF417 and linear codes for flexibility
- Ergonomic "aim and shoot" design
- Reliable and Durable providing long lasting performance
- Low Power Consumption for use in POT applications
- Full 8" / 20.3cm DOF

#### **Performance That You Expect From PSC**

The QuickScan® QS2500 Linear Imager Handheld Scanner is the newest member of the QuickScan® product family. For retail, office, and light-industrial applications, the QS2500's 200 scans-per-second linear imager scan engine provides snappy reading performance and a mid-range depth-of-field (up to 8.0" / 20.3 cm). And the QS2500 also reads poorly printed bar code labels quickly and easily.

#### **Loaded with Features for Today and Tomorrow**


The QS2500 is capable of reading a wide range of bar code symbologies, including Reduced Space Symbology (RSS) and PDF417, allowing you flexibility in reading now and in the future. It also features flash memory for easy software upgrades, along with programming and label editing. Its enclosure is lightweight and ergonomic, and has an available hands-free tabletop stand.

#### **Outstanding Durability and Reliability**

The QS2500's Linear Imager scan engine has no moving parts and will reliably read for years to come. It withstands 5' / 1.5m drops to concrete and has an IP42 sealing rating to protect it in most indoor applications. In addition, the QS2500 utilizes the same high-quality interface cables shared by other PSC handhelds, including the rugged PowerScan™ industrial handheld scanner. And the QS2500 is backed by PSC's three-year factory warranty on the scanner, and a one-year warranty on PSC interface cables.

#### **Exceptional Value**

The QS2500 is loaded with performance, features and reliability all at a surprisingly low price. Its three-year warranty and low purchase price minimize your cost of ownership. The QS2500 is an exceptional value!

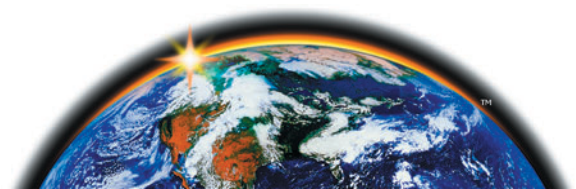

# Specifications

## QS2500

These product Specifications are subject to change without notice. Additional information concerning this product or other PSC products and services can be found at the PSC website: [www.pscnet.com](http://www.pscnet.com) or contact your PSC representative for more information.

### Mechanical

**Length:** 7.1" / 18.2 cm  
**Width:** 1.1" / 2.6 cm  
**Height:** 6.5" / 16.7 cm  
**Weight:** 6.3 oz. / 150 g (cable not included)  
**Scan window:** 5.0" / 12.5 cm at 4.0" / 10.0 cm

### Optical

**Light source:** 660 nM Visible Red Diode  
**Scan rate:** 200 scans/sec.  
**Depth-of-Field:** Refer to chart on this page  
**Resolution:** 5 mils / 0.13mm  
**Print contrast ratio:** 35% or less  
**Pitch:** ±60°  
**Skew:** ±75°  
**Scan angle:** 46°  
**Ambient light immunity**  
 Artificial & sunlight: 6,968 foot-candles / 75,000 Lux

### Electrical

**Operating voltage:** +5 VDC ±5%  
**Operating current**  
 Operating: 150 mA @ 5 VDC  
 Standby: 100 mA @ 5 VDC

### Environmental

**Temperature**  
 Operating: 32° to 122° F / 0° to 50° C  
**Humidity:** 5 to 95% NC  
**Shock:** Withstands ten 5.0' / 1.5 m drops onto concrete  
**Physical shock:** 1500 g, 1 ms  
**Water & Dust:** Resistant, IEC 529 rating IP42DW  
**ESD protection:** Functional after 15kV discharge

### Communications

**Single interface**

- RS-232
- Keyboard Wedge

### Decoding Capability – Autodiscriminates

- UPC A, E / EAN 8,13 / JAN 8, 13  
 (Codes add-ons P2 / P5, Code 128)
- Code 128
- Pharmacode 39
- Interleaved 2/5
- MSI/Plessey
- RSS-14 Stacked
- RSS-14 Expanded
- RSS Limited
- Codabar
- Code 93
- Code 39
- RSS 14
- RSS-14 Stacked
- Omni-directional
- PDF417 w/audio assist

### Safety & Regulatory

**Electrical:** Complies to – UL; cUL; EN60950  
**Emissions:** Complies to – FCC; EN 55022; BSMI CNS 13438; AS/NZS 3548; VCCI

Depth-of-Field			
Printing resolution, contrast and ambient light dependent			
Label Density	Range		
5 mils	0.0" to 2.5"	0.0 to 6.4 cm	
13 mils	0.5" to 5.0"	0.0 to 15.2 cm	
20mils	1.0" to 8.0"	2.5 to 20.0 cm	



This product is manufactured in Taiwan.



Gooseneck Tabletop Stand

### PSC Inc.

959 Terry Street  
 Eugene OR 97402-9150 USA  
 Tel: 800 695 5700 or 541 683 5700  
 Fax: 541 345 7140

### PSC Worldwide Sales and Service locations

Australia Tel: 61 2 9878 8999 Fax: 61 2 9878 8688	Belgium Tel: 32 2 414 74 09 Fax: 32 2 410 11 63	Brazil Tel: 55 11 5507 7721 Fax: 55 11 5507 7696	Chile Tel: 562-339-7003 Fax: 562-946-1685	China Tel: 86 10 6857 9048 Fax: 86 10 6857 8699	China - South Tel: 86 20 8765 9955 Fax: 86 20 8765 9955	France Tel: 33 1 64 86 71 00 Fax: 33 1 64 46 72 44	Germany Tel: 49 6151 93580 Fax: 49 6151 935858
Hong Kong Tel: 852 25846210 Fax: 852 25210291	India Tel: 91 11 464 1662 Fax: 91 11 464 1662	Italy Tel: 39 039 629031 Fax: 39 039 6859496	Japan Tel: 81 3 3491 6761 Fax: 81 3 3491 6656	Latin America Tel: 1 305 539 0111 Fax: 1 305 539 0206	Singapore Tel: 65 435 1311 Fax: 65 226 1242	Spain Tel: 34 91 203 65 00 Fax: 34 91 203 65 01	Sweden Tel: 46 4010 84 92 Fax: 46 4010 84 91
Turkey Tel: 90 212 23691 15 Fax: 90 212 23691 16	United Kingdom Tel: 44 1923 809500 Fax: 44 1923 809505						

